



JET HEAT


HEATING

AIR CONDITIONING

DEHUMIDIFICATION

SOLAR HYBRID LIGHT TOWERS

SERVICE YOU TRUST.
EQUIPMENT YOU NEED.

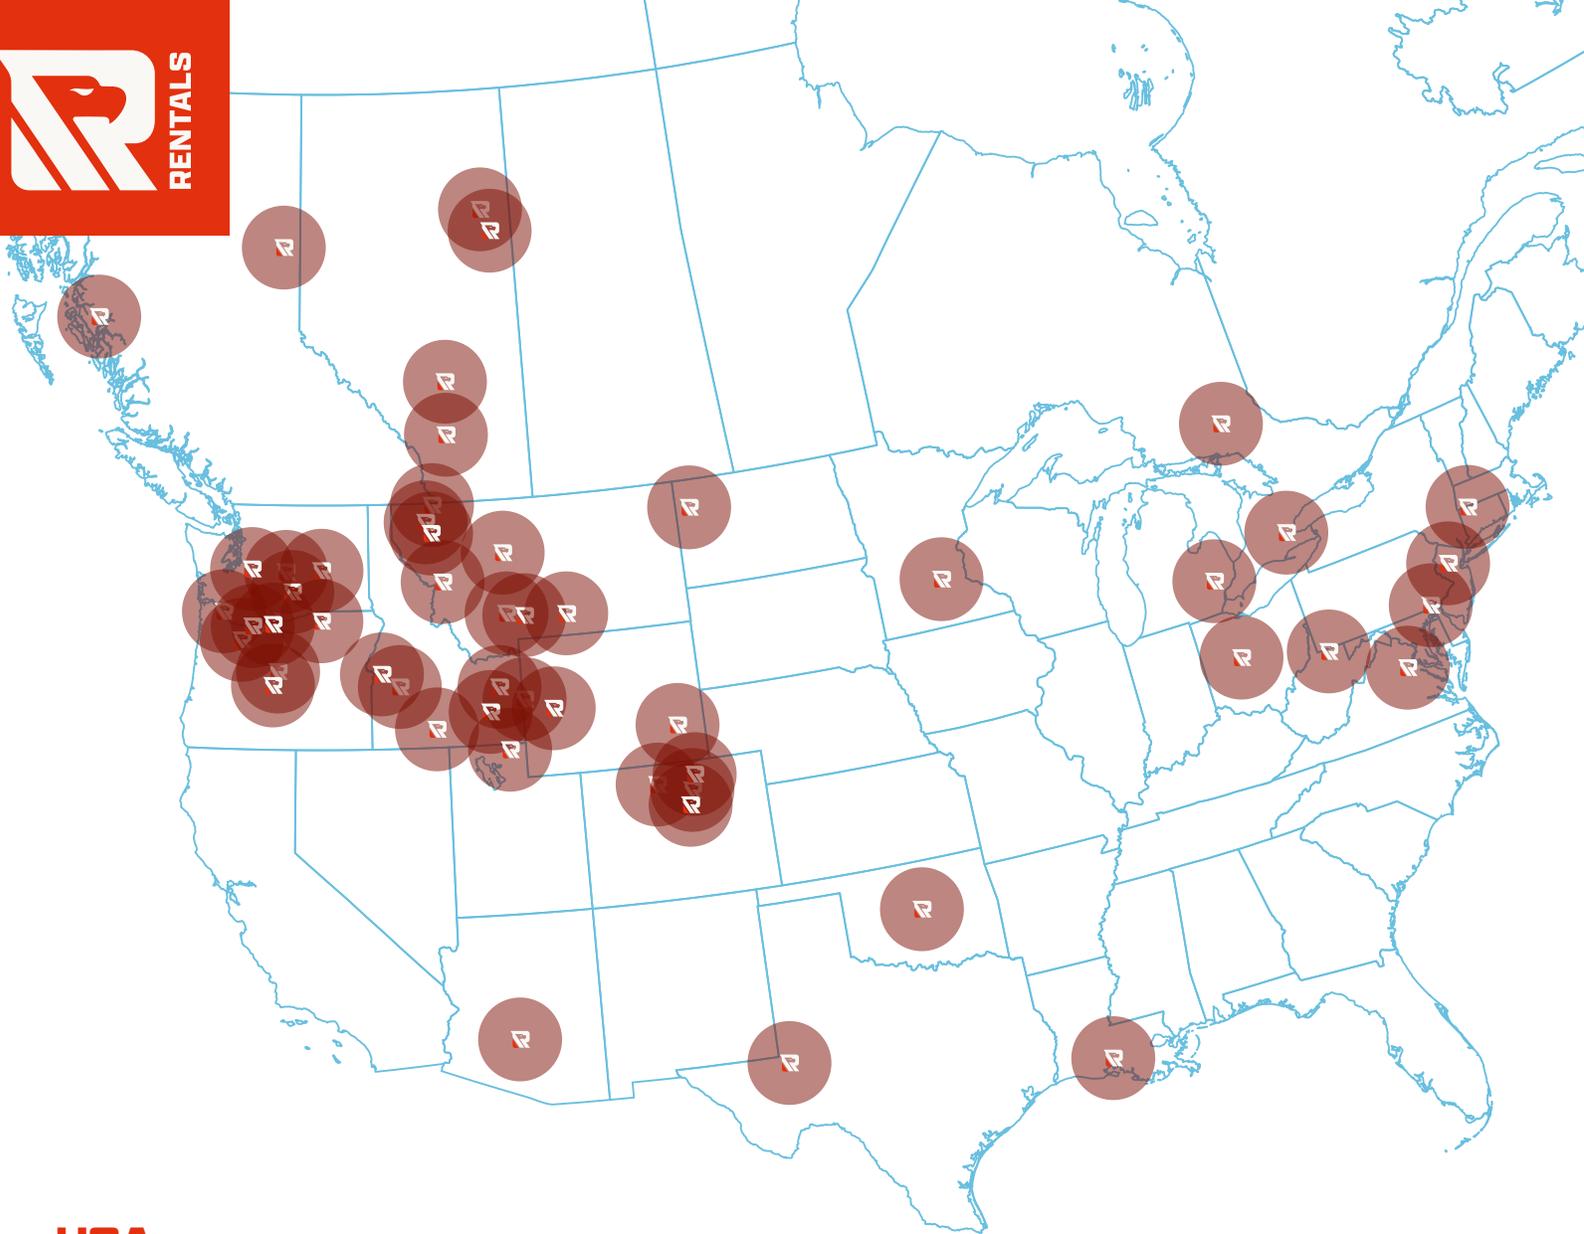

USA

Alpine, Wyoming
 Belgrade, Montana
 Bend, Oregon
 Bigfork, Montana
 Boise, Idaho
 Brighton, Colorado
 Camas, Washington
 Chaska, Minnesota
 Cle Elum, Washington
 Denver, Colorado
 Edmond, Oklahoma

Evans, Colorado
 Fredericksburg, Virginia
 Granby, Colorado
 Great Falls, Montana
 Hermiston, Oregon
 Hood River, Oregon
 Idaho Falls, Idaho
 Kalispell, Montana
 Lakewood, Washington
 Laurel, Montana
 Livingston, Montana

Livonia, Michigan
 Hyde Park, Utah
 Marysville, Ohio
 Missoula, Montana
 Morgantown, West Virginia
 Moses Lake, Washington
 New Iberia, Louisiana
 Odessa, Texas
 Ontario, Oregon
 Pinedale, Wyoming
 Redmond, Oregon

Scottsdale, Arizona
 Seaside, Oregon
 South Plainfield, New Jersey
 South Windsor, Connecticut
 Twin Falls, Idaho
 Williston, North Dakota
 Wheatland, Wyoming
 Whitefish, Montana
 Wilsonville, Oregon
 Wilmington, Delaware
 Yakima, Washington

CANADA

Anzac, Alberta
 Brantford, Ontario

Calgary, Alberta
 Fort McMurray, Alberta

Fort St. John, British Columbia
 Kitimat, British Columbia

Red Deer, Alberta
 Sudbury, Ontario



RENTAL AIR CONDITIONING

SPECIFICATIONS

**12
TON
AC**



Cooling Capacity	135,000 BTU
Refrigerant	R-410A
Voltage / Phase / Hertz	480/3/60
Full Load Amps	63
Weight	2,200
L x W x H	95.5" x 35" x 75.7"

**25
TON
AC**



Cooling Capacity	25 Tons
Refrigerant	R-410A
Voltage / Phase / Hertz	480/3/60
Full Load Amps	48 Cooling / 123 Heating
Weight	3,200
L x W x H	92" x 128" x 63"

**30
TON
AC**



Static Pressure / CFM	6.5" static @4,500CFM
Refrigerant	R-410A
Voltage / Phase / Hertz	480/3/60
Full Load Amps	114
Weight	5,000
L x W x H	97" x 72" x 98.25"

**45
TON
AC**



Static Pressure / CFM	6.5" static @6,000CFM
Refrigerant	R-410A
Voltage / Phase / Hertz	480/3/60
Full Load Amps	125
Weight	7,200
L x W x H	88" x 96" x 99.75"

**80
TON
AC**



Cooling Capacity	960,000BTU
Refrigerant	R-410A
Voltage / Phase / Hertz	480/3/60
Full Load Amps	218
Weight	5,700
L x W x H	12' x 8' x 8'2"

Feature Units. Full product offering available upon request.

RENTAL AIR CONDITIONING

PORTABLE COOLING

**1 TON
TO
5 TON
AC**



MODEL	COOLING/BTU	CFM	POWER	WEIGHT W x D x H	REFRIGERANT
1 Ton	13,200	405	115V 60H 12 Amps	185 lbs 20.6x26.4x41"	R410A
1.5 Ton	16,800	470	115V 60H 20 Amps	181 lbs 20.6x26.4x41"	R410A
2 Ton	21,000	560	208V 60H 15 Amps	196 lbs 20.6x26.4x41"	R410A
3 Ton	37,000	882	208V 60H 30 Amps	254 lbs 26.0x33.3x52.4"	R410A
5 Ton	60,000	2,000	208V 60H 50 Amps	661 lbs 28.9x 1.5x59.8"	R410A

PORTABLE COOLING WITH HEAT PUMP

**1 TON &
1.5 TON**



MODEL	COOLING/BTU	CFM	POWER	WEIGHT W x D x H	REFRIGERANT
1 Ton w/ Heat Pump	13,200	305	115V 60H 20 Amps	230 lbs 20.6x26.4x41"	R410A
1.5 Ton w/ Heat Pump	16,800	400	115V 60H 20 Amps	190 lbs 20.6x26.4x41"	R410A

LGR DEHUMIDIFIERS

**280
TO
400
CFM**



MODEL	CFM	WATER REMOVAL	DIMENSIONS W x D x H	WEIGHT	POWER
7000 XLi	280	130 PTS/Day	20x33.5x20"	106 lbs	115V 8.8Amps
3500 i	400	170 PTS/Day	24x 40.5x23	157 lbs	120V 10.8Amps

**PHOENIX
250
MAX**



MODEL	CFM	WATER REMOVAL	DIMENSIONS W x D x H	WEIGHT	POWER
250 Max	365	145 PTS/Day	20x23x40"	119 lbs	120V 8.2Amps

Feature Units. Full product offering available upon request.

PORTABLE COOLING & DEHUMIDIFICATION



FEATURES

- Multiple power Voltages available (110V-480V)
- Easy to setup, operate and maneuver
- Portable and mobile units with easy to roll casters attached
- 110V operation on many units - simply plug into outlet and cooling begins
- Air cooled or water-cooled options in fleet
- Heat pump options available (heating and cooling in one unit)
- Portable heating and cooling available with 120V unit
- Contact for 24/7 emergency delivery available
- Delivery, installation and removal available

PORTABLE AIR CONDITIONING FOR MANY APPLICATIONS:

Office and commercial spaces for short term cooling, Temporary cooling in computer rooms and for server racks, assisted living, hospitals and medical facilities, commercial and retail spaces, manufacturing areas, educational settings (classrooms and lecture halls)

Portable LGR

- 120V "plug and play"
- Control moisture quickly and easily
- Built-in pumping system with attached drainage hose
- Easy to operate and maneuver
- Handle and wheels for ease of movement

Applications:

For use in areas with high humidity, especially in construction sites and in facilities following fire or water damage



RENTAL DESICCANT DEHUMIDIFIERS

Feature Units. Full product offering available upon request.

SPECIFICATIONS

**2,250
CFM DH**



CFM (Process)	2,250
Static Pressure	2"
Voltage / Phase / Hertz	480/3/60
Full Load Amps	52
Weight	1,250
L x W x H	89" x 29" x 58"

**4,500
CFM DH**



CFM (Process)	4,500
Static Pressure	4"
Voltage / Phase / Hertz	480/3/60
Full Load Amps	108
Weight	1,950
L x W x H	98" x 46" x 77"

**5,000
CFM DH**



CFM (Process)	5,000
Static Pressure	5"
Voltage / Phase / Hertz	480/3/60
Full Load Amps	148
Weight	4,400
L x W x H	101" x 50" x 96"

**7,500
CFM DH**



CFM (Process)	7,500
Static Pressure	5"
Voltage / Phase / Hertz	480/3/60
Full Load Amps	178
Weight	4,400
L x W x H	101" x 50" x 96"

**15,000
CFM DH**



CFM (Process)	15,000
Static Pressure	6"
Voltage / Phase / Hertz	480/3/60
Full Load Amps	345
Weight	9,500
L x W x H	140" x 100" x 101"

Some dual-fuel units available that operate on gas and/or electric.

HEATERS

Feature Units. Full product offering available upon request.

DIRECT FIRED HEATERS

150K TO 1.4M BTUs



BTU	POWER	WEIGHT	DIMENSION LxWxH	FUEL TYPE	CERTIFICATION
150,000	120V 7 Amp	100 lbs	31"x22"x23"	Propane/NG	AGA/CSA/ETL
250,000	120V 14 Amp	150 lbs	40"x27"x29"	Propane/NG	AGA/CSA/ETL
400,000	120V 9 Amp	220 lbs	45"x28"x35"	Propane/NG	AGA/CSA/ETL
500,000	120V 7 Amp	135 lbs	42"x24"x27"	Propane/NG	AGA/CSA/ETL
700,000	120V 11 Amp	280 lbs	51"x32"x41"	Propane/NG	AGA/CSA/ETL
1,000,000	120V 12 Amp	195 lbs	48"x25"x31"	Propane/NG	AGA/CSA/ETL
1,400,000	120V 13 Amp	330 lbs	54"x32"x41"	Propane/NG	AGA/CSA/ETL

INDIRECT FIRED HEATERS

350K TO 1.0M BTUs



BTU	PERFORMANCE	WEIGHT	DIMENSION LxWxH	FUEL TYPE	CERTIFICATION
350,000	2500CFM	580 lbs	83"x37"x52"	Propane/NG/ Diesel	AGA/CSA/ETL
500,000	3100CFM	580 lbs	83"x37"x52"	Propane/NG/ Diesel	AGA/CSA/ETL
750,000	4280CFM	865lbs	94"x32"x53"	Propane/NG	USA/CAN
1,000,000	4075CFM	1300 lbs	120"x31"x54"	Propane/NG/ Diesel	AGA/CSA/ETL

ELECTRIC HEATERS

10 TO 60 KWs



KW	VOLTS	AMPS	PHASE
10	240	42	1
15	240	36	3
15	480	18	3
15	208	42	3
15	240	62.5	1
60	480	68	3
150	480	196	3



MAKE-UP AIR HEATERS

Feature Units. Full product offering available upon request.

SPECIFICATIONS

650K BTU



Up to 650,000 BTU, modulating
5,500 cfm output of heat
4" of static pressure
LP or NG
120v at 12.7 amps
20" duct outlet

Units are **STACKABLE**
Ducting up to 100'
Dimensions:
L68" x W30" x H43.5"
Weight: 500 lbs

1.6M BTU



Up to 1,600,000 BTU, modulating
9,400 cfm output of heat
1ph or 3ph 230V at 40A
LP or NG
Designed for metal ducting

Units are **STACKABLE**
Forklift pockets
Dimensions:
L92" x W31.5" x H62.5"
Weight: 995 lbs

2.5M BTU



Up to 2,500,000 BTU, modulating
14,737 cfm heated output
1ph or 3ph 230V at 60A
LP or NG
Designed for metal ducting

Units are **STACKABLE**
Forklift pockets
Dimensions:
L111" x W31.5" x H78.5"
Weight: 1640 lbs

4.5M BTU



Up to 4,500,000 BTU, modulating
24,390 CFM heated output
230v 3PH 56A OR
480v 3PH 28A
LP or NG

Designed for metal ducting
Units are stackable
Forklift pockets
Dimensions:
L126" x W44" x H79"
Weight: 2,327 lbs

The CH15HS Jet Heater uses a patented turbofan jet engine technology to achieve industry leading heating efficiency. With greater than 95% efficiency and less than 60% CO2 emissions, the CH15HS is the most fuel friendly and the cleanest flameless heater in its class.

JET HEATER

CH15HS



FEATURES

- 1.4 Million BTU Equivalent
- 2.9-4.9 GPH Fuel Consumption
- Hot air delivery up to 500 Ft
- 200° F temperature rise
- 3900-7200 CFM
- 20" above WC static pressure
- 110% secondary containment
- Clean breathable air
- Self-contained unit (No external power required)
- Variable setting — Low, Medium, High
- Onboard diagnostics with safety shutdown
- Rugged design for durability

ENVIRONMENTAL IMPACT

Emissions Reduction

- 97% engine efficiency
- Average reduction of 127 tons of CO2 — *Equivalent CO2 of 140,000 pounds of coal burned*

Fuel Consumption

- As low as 2.9 GPH fuel consumption
- Reduce Fuel costs up to 50%
- Most fuel efficient diesel flameless heater

TOTAL PROJECT SAVINGS

- **Up to \$140,000 annually per heater**
- Replace up to 8 indirect heaters with 1 Jet Heater



HEAT DELIVERED UP TO 500' AWAY

View the Demo and see it in action

APPLICATIONS

OIL & GAS

Drill Deck, Pump Station & Water Line Heating
Frost Prevention System
Multiple Wellheads & BOPs Heating
Pipeline Heating & Thermal Conditioning

CONSTRUCTION

Concrete Curing | Ground Thaw
Aggregate Heating | Shotcreting
Multi-Storey Construction Heating
Worker Comfort

COATING & PAINTING

Tank Coating & Curing
Moisture & Humidity Control
| Dehumidification | Surface Preparation
Auxiliary Heat | De-Icing

The Cahill Hybrid LT is a solar powered light tower combined with a Kubota Diesel powered DC Generator. With an extremely low fuel consumption, the Cahill Light Tower will run up to 35 days before refueling.

SOLAR HYBRID LIGHT TOWER

FEATURES

- Hybrid technology - Solar and DC Generator
- Average 3 hours of engine runtime/day
- Up to 8 hours runtime on solar and battery between charges
- Dawn to Dusk feature - automatically shuts off during daylight hours
- Remote monitoring, start and stop technology
- 68,000 Lumens of LED light
- Positive air shutoff
- Winter operating package
- Operating costs savings up to \$80/day

TOTAL PROJECT SAVINGS

- Up To \$25,000 Annually/Light Tower

SMALL STEPS LEAD TO BIG CHANGE!

Reduce Engine Emissions By Up To 90%

#NETZERO

ENVIRONMENTAL IMPACT

Emissions Reduction

- Solar Hybrid Battery Powered
- Average reduction of 56 tons of CO₂
- Equivalent CO₂ of 62,000 pounds of coal burned

Fuel Data

- As low as 0.2 GPH fuel consumption
- Reduce fuel costs up to 50%
- Auto on/off Dawn to Dusk





SERVICE YOU TRUST. EQUIPMENT YOU NEED.

REIC RENTALS

REIC.COM | INFO@REIC.COM