

# LED LIGHT TOWER

## DIESEL POWERED

- 6 x 320W high efficiency LED light heads have a 5 year warranty and are easily tilted & rotated by hand illuminating a 62,500 sq ft area.
- Powered by a Kubota engine with 8.5kW alternator allows users to run small tools - 22-24 amps.
- Hydraulically operated vertical mast fully raises in 10 sec. with the push of a button with 27' maximum height.
- Set the timer and go, no need to send labor to start every night - 16 event 7 day digital timer and dusk to dawn operation. Save time and money!
- Built for a long life - rugged 14 gauge steel enclosure and fenders are galvanized and powder coated inside and out.
- 110% containment base



Featuring 6 high efficiency LED heads that can be adjusted by hand.



# LED LIGHT TOWER

## MAST, DIMENSIONS & WEIGHT

Mast Height	27'
Wind Rating	50 mph
Fully Retractable Stabilizers	Yes
Axle	Torsion
Drawbar	Tubular Steel
Unit Dimensions - Stowed	106"l x 56"w x 102"h
Operating Dimensions	106"l x 81"w x 335"h
Dry Weight	2381lbs
Operating Weight	2645lbs

## ENGINE

Make	Kubota
Model	D1105
Emission Regulation	Tier 4
Type	Vertical 4 Cycle, Liquid Cooling, Diesel
Cylinder	3
Displacement / L (cu.in)	1.123 (68.53)
Combustion System	IDI
Intake System	Naturally Aspirated
Maximum Speed	1800 rpm
Sound Level @ 23'	68 dBA

\*Specs subject to change

## ALTERNATOR

Make	Linz
Output	8.5 kW
Hz	60


## FUEL

Type	Diesel
Fuel Capacity	31 gal.
Run Time	72 Hours

## SECONDARY CONTAINMENT

Containment Base	110%
------------------	------

Illuminated area = 62,500 sq ft

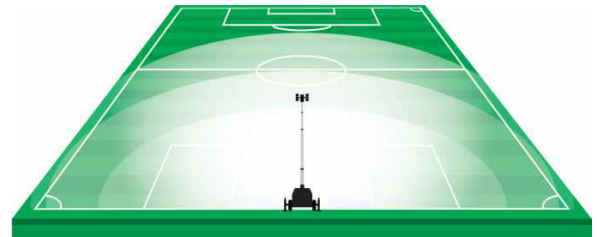

## APPLICATIONS

